


Architectural Barriers

ALUMINIUM BRIDGES B MODEL with reclining handrail for pedestrian and vehicles passage over gaps



HANDRAIL DRAWING

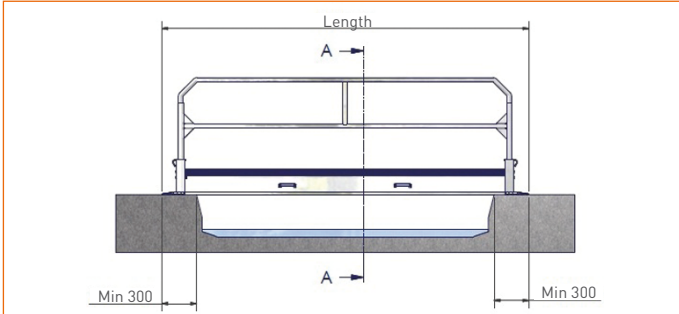

Extended



Half extended



Stowed

TECHNICAL DETAILS

Maximum load capacity	5.500 kg
Length	from 1,2 to 6,0 m
Internal width:	from 1.000 to 1.250 mm

MODEL	WIDTH		WEIGHT	LENGTH	MAX TRENCH WIDTH	LOAD CAPACITY FOR RUBBER TRACK VEHICLE	LOAD CAPACITY FOR WHEELED VEHICLES
	INTERNAL	EXTERNAL					
	mm						
B.1200/100.RC0	1.000	1.132	34	1200	600	5.500	4.400
B.1200/125.RC0	1.250	1.382	38	1200	600	3.200	1.400
B.1600/100.RC0	1.000	1.132	44	1600	1.000	5.500	4.400
B.1600/125.RC0	1.250	1.382	49	1600	1.000	3.200	1.400
B.2200/100.RC0	1.000	1.132	58	2200	1.600	3.200	3.200
B.2200/125.RC0	1.250	1.382	65	2200	1.600	3.200	1.400
B.2600/100.RC0	1.000	1.132	68	2600	2.000	2.500	2.400
B.2600/125.RC0	1.250	1.382	77	2600	2.000	2.500	1.400
B.3200/100.RC1	1.000	1.132	82	3200	2.600	1.850	1.850
B.3200/125.RC1	1.250	1.382	93	3200	2.600	1.850	1.400
B.4000/100.RC2	1.000	1.132	100	4000	3.400	1.350	1.350
B.4000/125.RC2	1.250	1.382	115	4000	3.400	1.350	1.350
B.5000/100.RC2	1.000	1.132	125	5000	4.400	1.000	1.000
B.5000/125.RC2	1.250	1.382	142	5000	4.400	1.000	1.000
B.6000/100.RC2	1.000	1.132	150	6000	5.400	840	840
B.6000/125.RC2	1.250	1.382	170	6000	5.400	840	840

Architectural Barriers

ALUMINIUM BRIDGES BL MODEL

with fixed handrail light version for pedestrian passage over gaps



TECHNICAL DETAILS

Maximum load capacity	400 kg
Length	from 1,0 to 3,0 m
Internal width:	from 600 to 1.000 mm

MODEL	WIDTH		WEIGHT	LENGTH	MAX TRENCH WIDTH	LOAD CAPACITY
	INTERNAL	EXTERNAL				
	mm					
BL.1000/60	600	686	23	1.000	400	400
BL.1000/100	1.000	1.086	28	1.000	400	400
BL.1400/60	600	686	29	1.400	800	400
BL.1400/100	1.000	1.086	36	1.400	800	400
BL.1800/60	600	686	35	1.800	1.200	400
BL.1800/100	1.000	1.086	44	1.800	1.200	400
BL.2000/60	600	686	38	2.000	1.400	400
BL.2000/100	1.000	1.086	49	2.000	1.400	400
BL.2400/60	600	686	44	2.400	1.800	400
BL.2400/100	1.000	1.086	57	2.400	1.800	400
BL.2800/60	600	686	50	2.800	2.200	400
BL.2800/100	1.000	1.086	65	2.800	2.200	400
BL.3000/60	600	686	53	3.000	2.400	400
BL.3000/100	1.000	1.086	69	3.000	2.400	400

LOAD CAPACITY REFERS TO

Tracked vehicles	Minimum wheelbase 1,0 mt
	Minimum tread 0,7 mt
	Minimum track width 0,2 mt
Wheeled vehicles	Minimum wheelbase 0,75 mt
	Minimum tread 0,9 mt
	Minimum wheel contact patch 0,2 x 0,2 mt